

# Development of a Single Ion Detector for Radiation Track Structure Studies

F. Vasi, M. Casiraghi, R. Schulte,  
V. Bashkirov

PAUL SCHERRER INSTITUT



**HIRSLANDEN**

KLINIK HIRSLANDEN



LOMA LINDA UNIVERSITY  
HEALTH

# Outline


- Purpose
- Detector Working Principle
- First Prototype Characterization
- Thick GEMs From The CERN PCB Workshop
- Measurements With a Microbeam
- Efficiency vs Cathode Resistivity
- Summary & Outlook

# Purpose

Development of a device for characterization of radiation track structure to study radiation biological effectiveness



*Radiation track structure: spatial distribution of energy transfer points in radiation-matter interaction*

- Local clustering of energy transfer points, in particular ionizations, is important for the production of initial biological damage
- MC simulations show large ionization clusters induced, in particular, by high LET radiation, which can create complex DNA damages
- Ideal detector should provide information on spatial distribution of ionization events with single ionization resolution

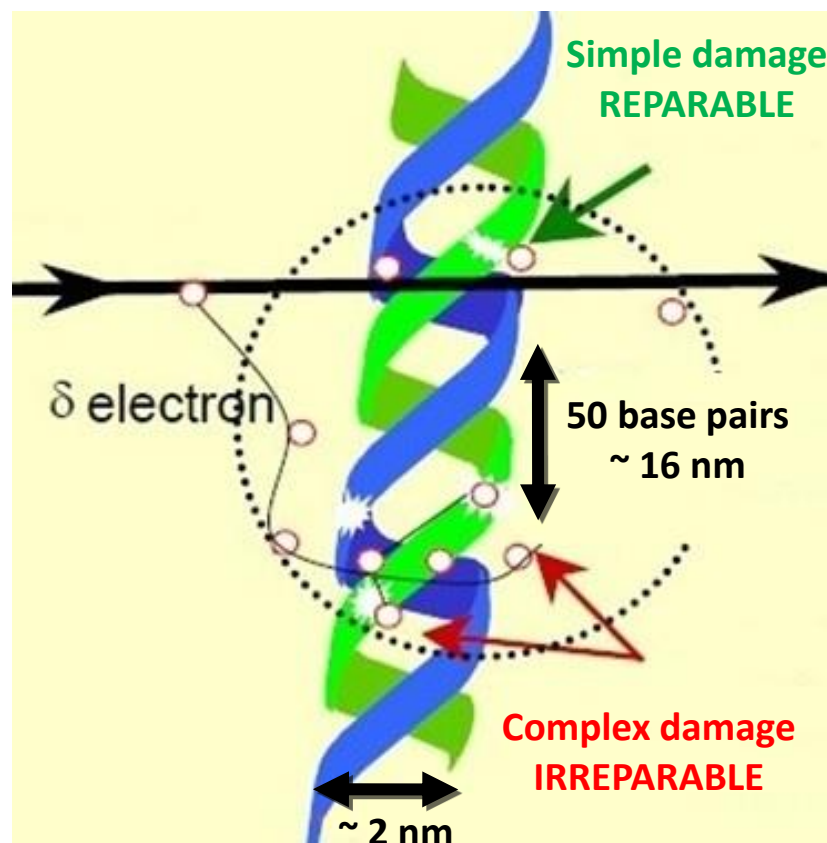


Readout strips


# Detector Principle

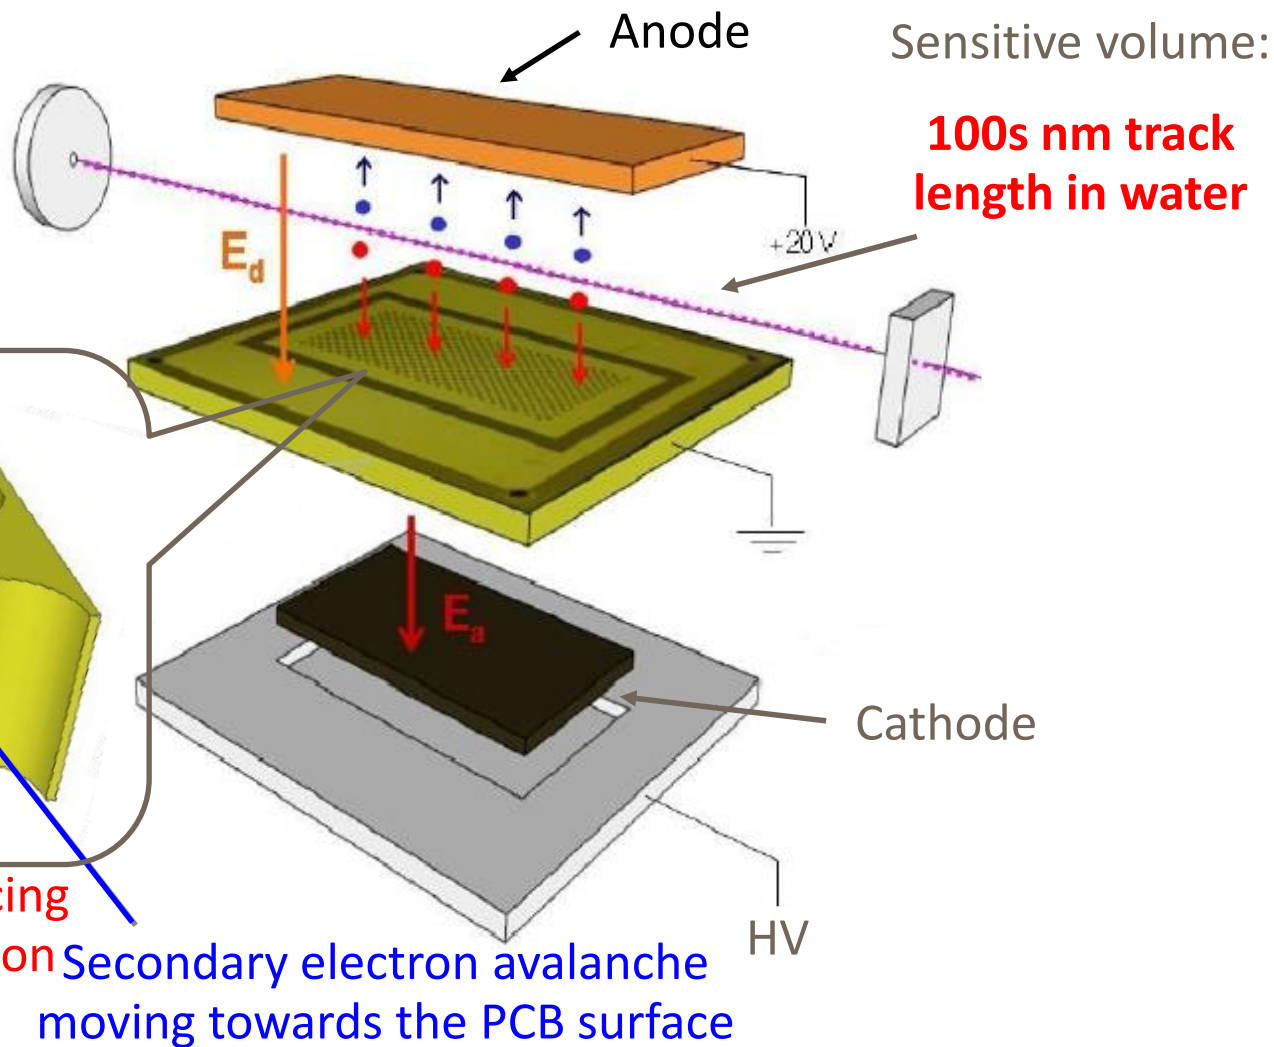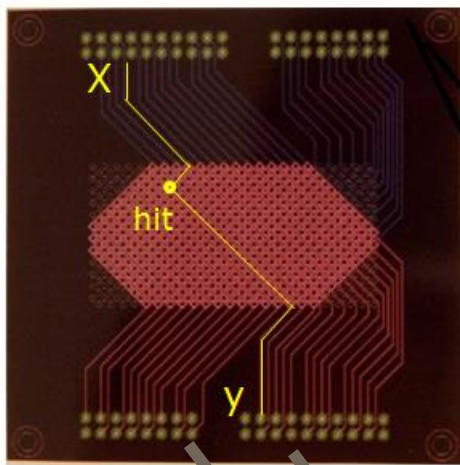


# First Prototype Characterization

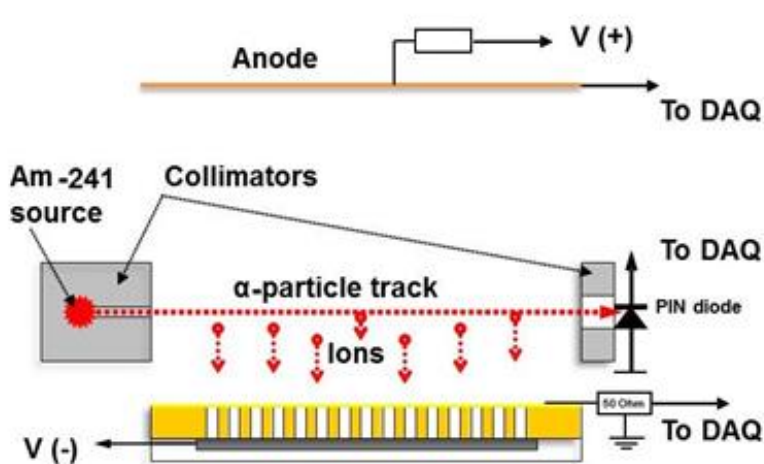


- Source:
  - Am-241 alphas 2 mm beam
- Working gas:
  - propane
- PCB:
  - 3.3 mm G10 board with common top electrode
  - Holes 0.8 mm, pitch 2 mm
- Cathodes:
  - Float glass
  - Schott glass

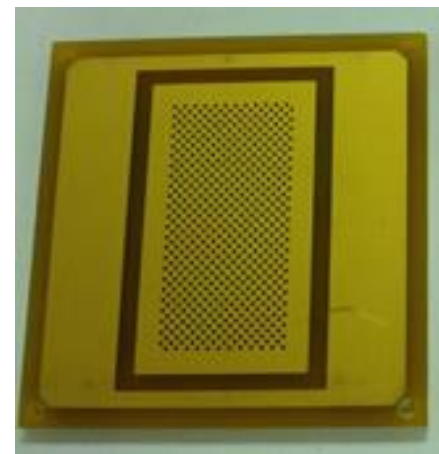


Pulse of 5 mV and 500 ns  
High gain

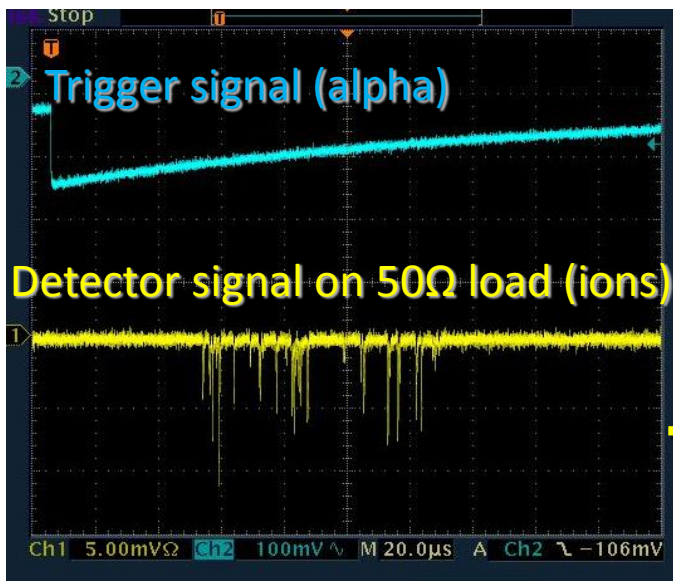

$P = 3 \text{ mbar}$   
 $HV = -800 \text{ V}$   
 $E_d = 10 \text{ V/cm}$

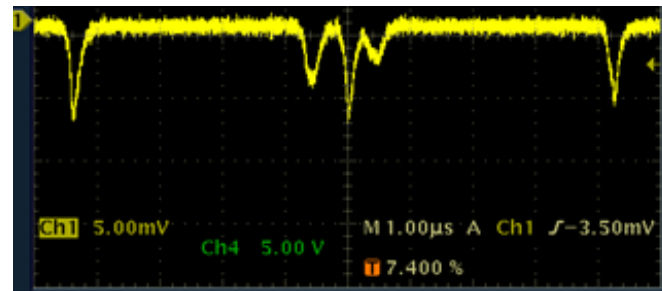


# Ion Arrival Time

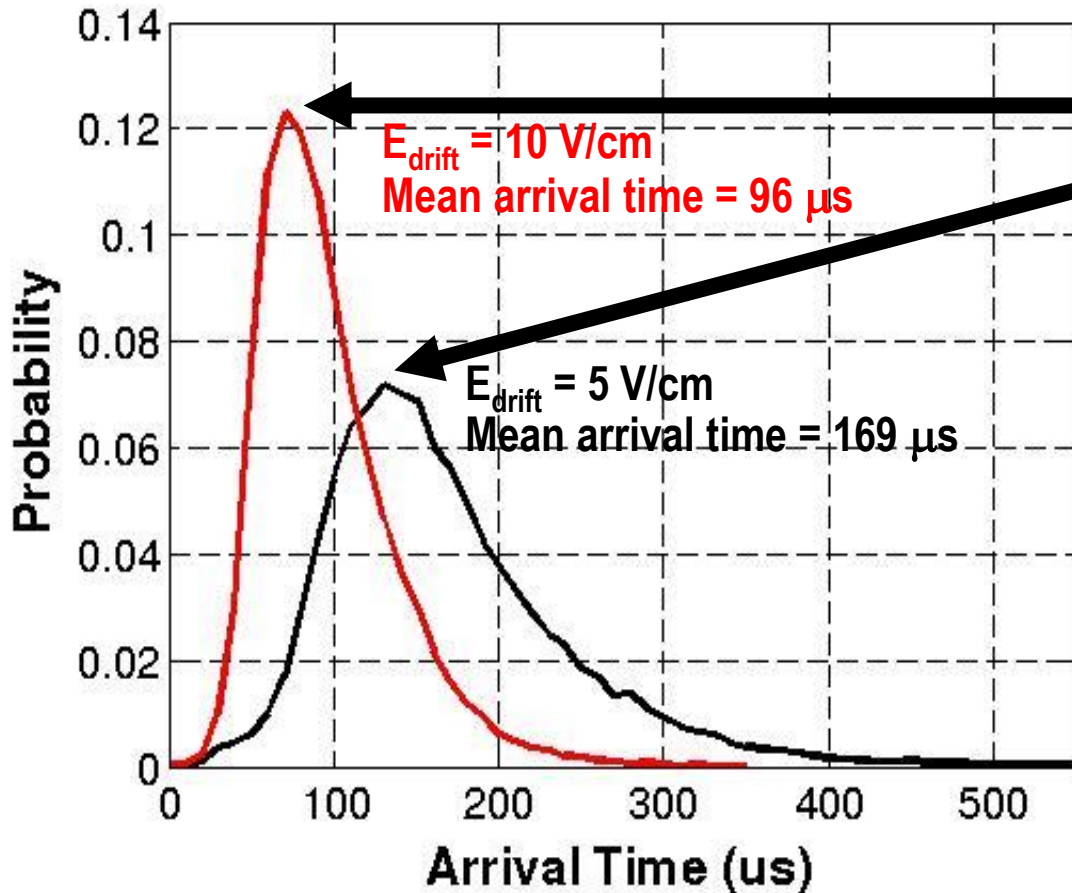

Peak shift confirms  
the signal comes  
from the track.


# Ion Detection Efficiency

Measured distribution

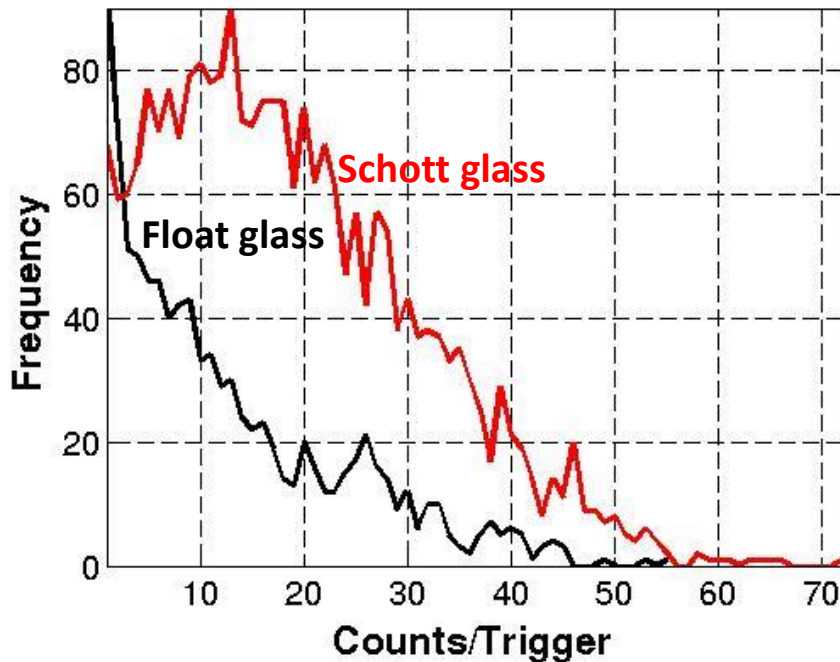

Compared to simulation, very low ion detection efficiency of the order of a few %


Simulated distribution  
(Geant4 low energy)

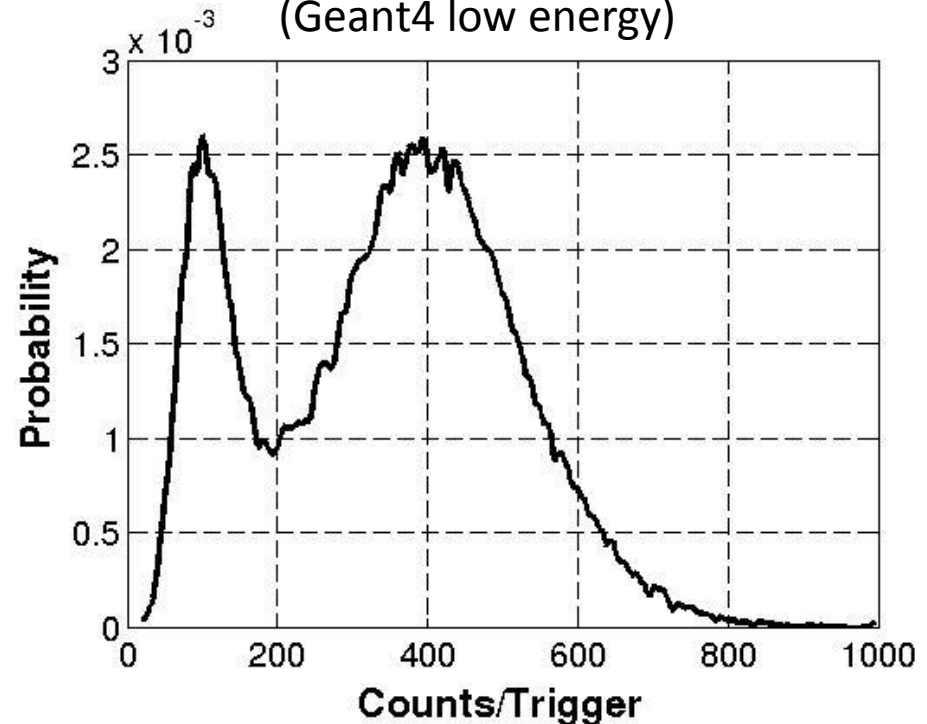

Possible causes:

- Long cathode recharge time
- Low ion-impact ionization probability


# Thickness of The Dielectric Plate

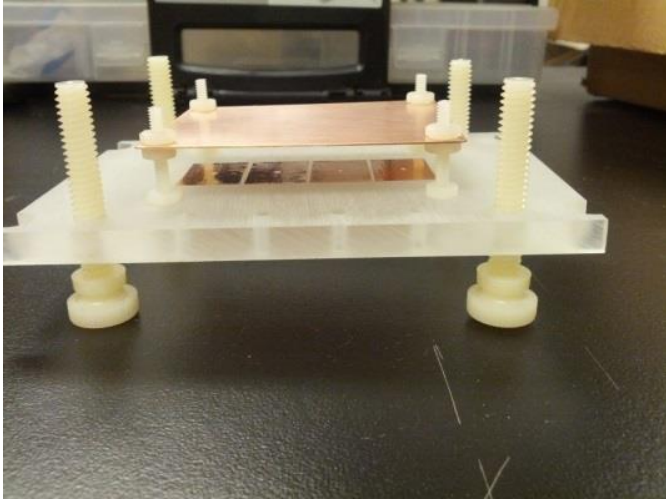

- Prototype with 4 holes of 1 mm diameter and a pitch of 11 mm

- Cathode: Float glass


- Three versions with different thicknesses of an acrylic plate: 3.3 mm, 6.5 mm, and 8.7 mm

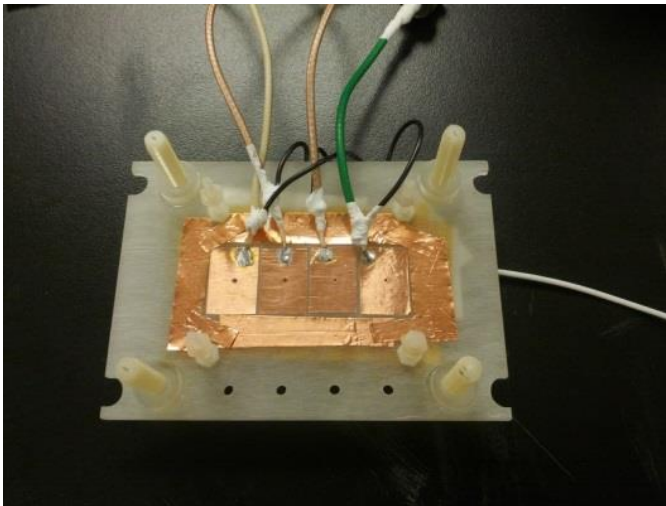




# Alpha Detection Efficiency

Efficiency: % of primaries producing at least one ionization in one of the holes

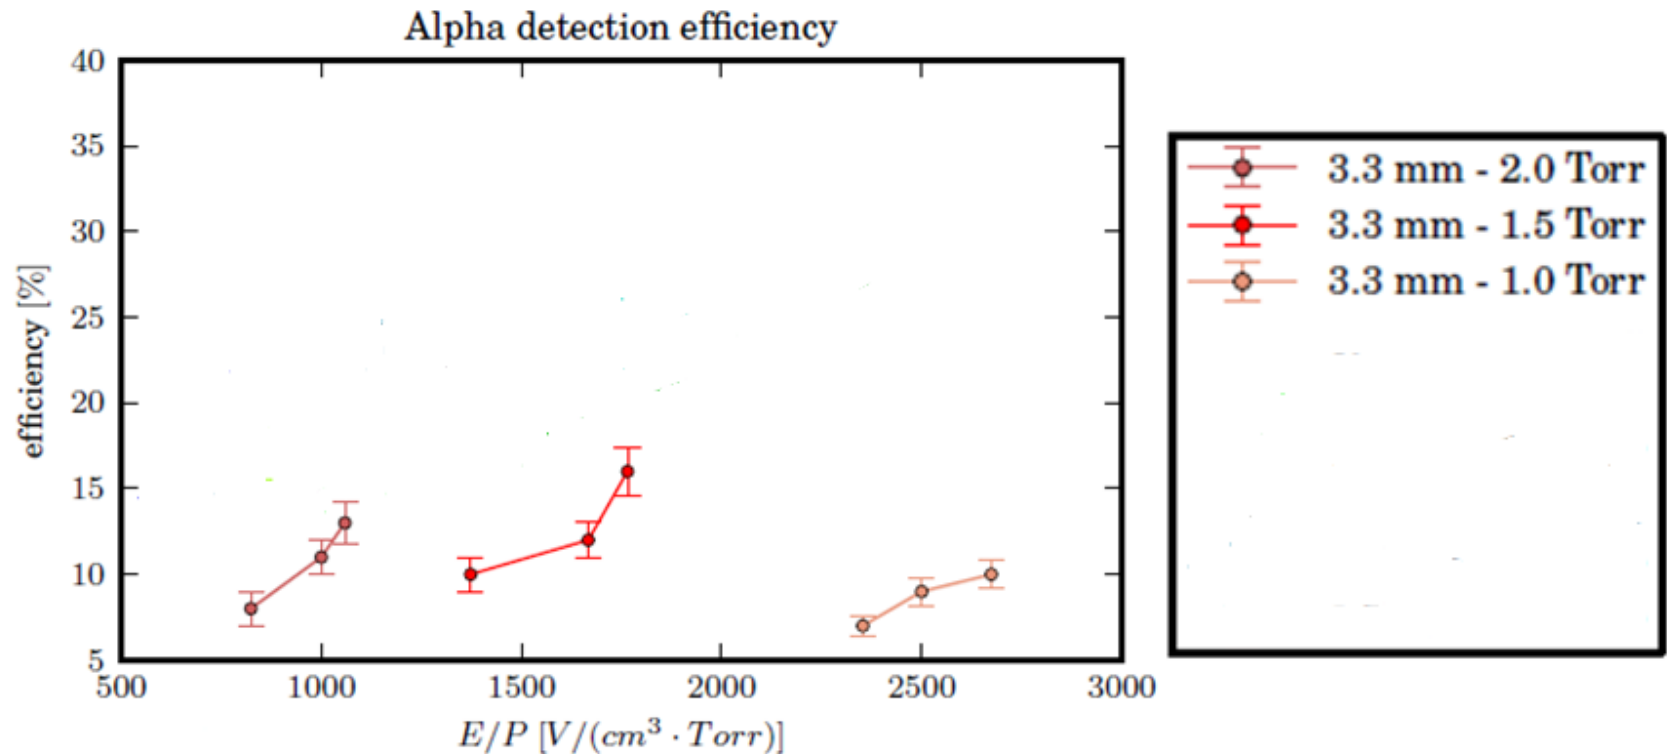


# Alpha Detection Efficiency

Efficiency: % of primaries producing at least one ionization in one of the holes

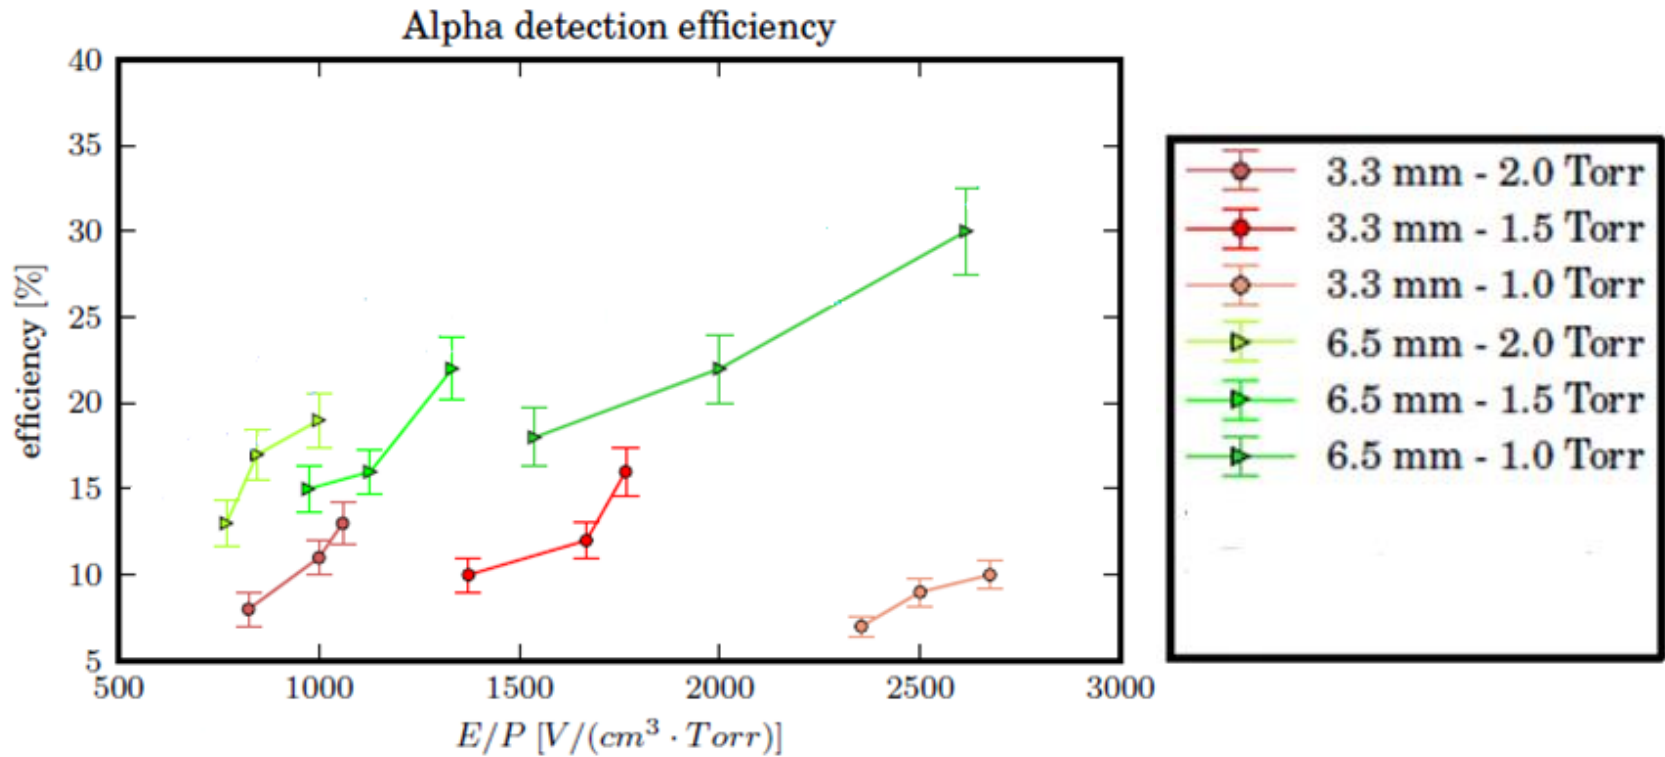

# Alpha Detection Efficiency


Efficiency: % of primaries producing at least one ionization in one of the holes

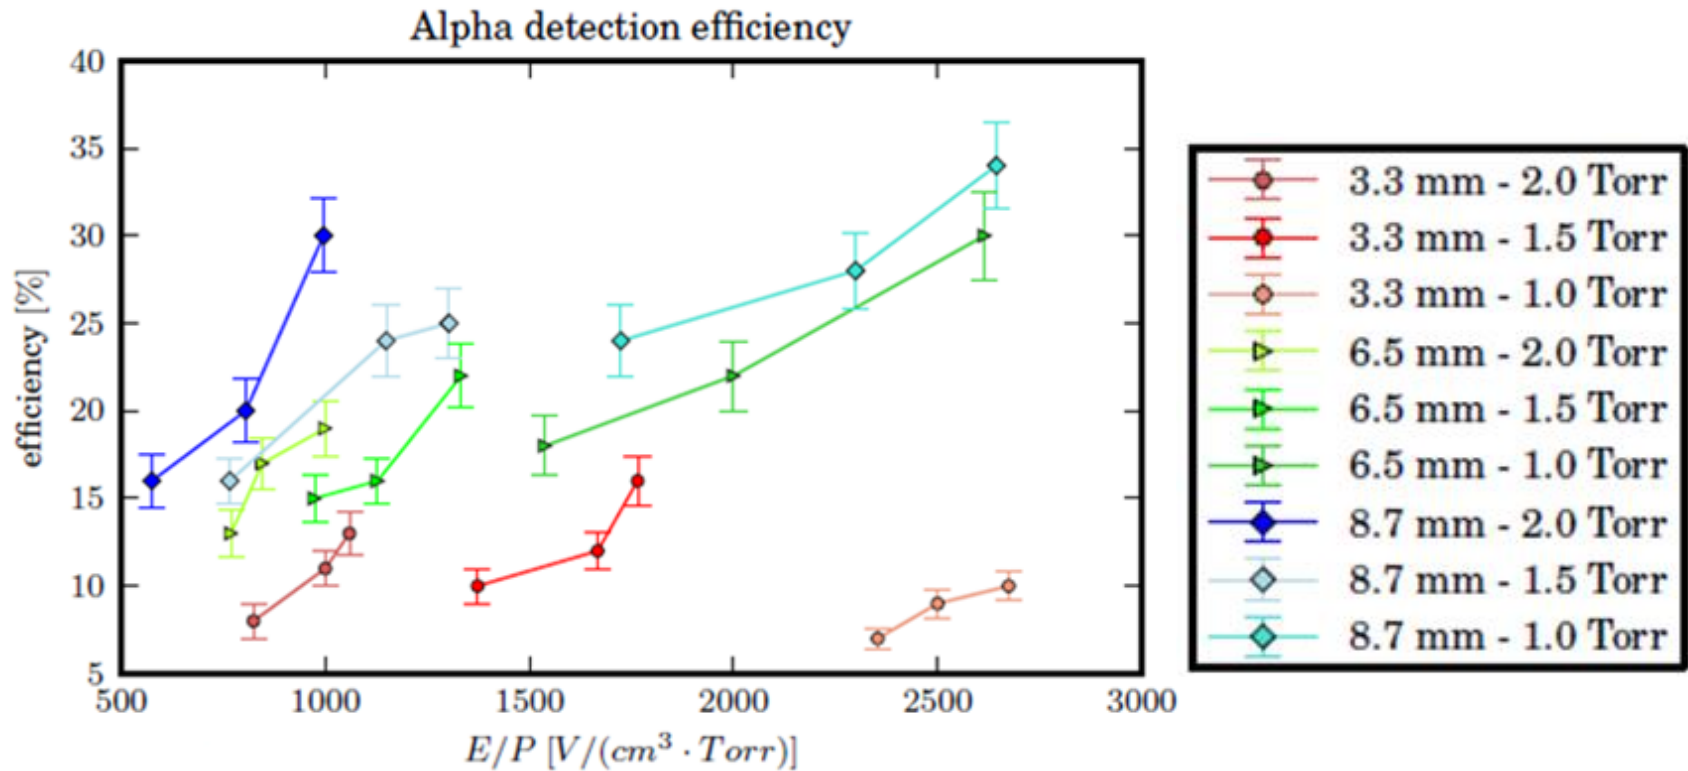


# The New Prototype

Thick GEMs from the CERN PCB workshop : FR4 1 cm thick


**Design 1:** 1.5 mm holes, pitch 6 mm

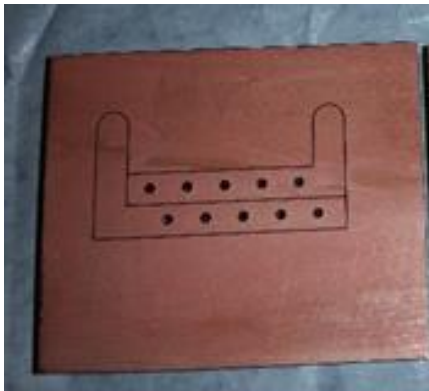


Resistive cathode outside the low pressure volume

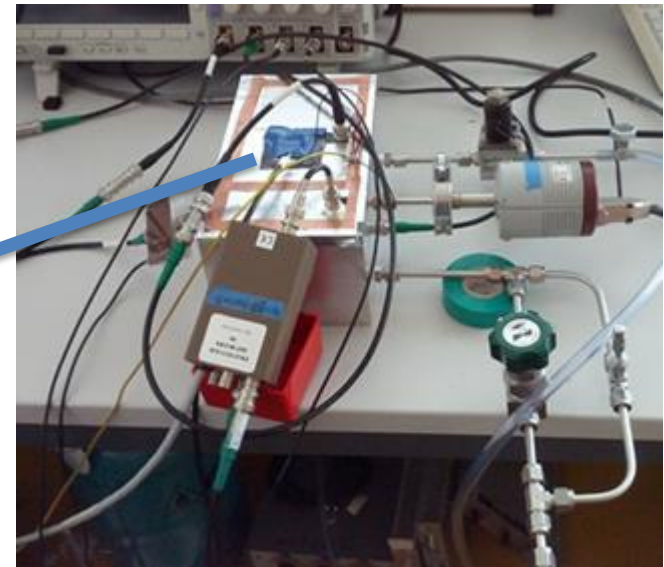


**Design 2:** 1.5 mm holes, pitch 4 mm

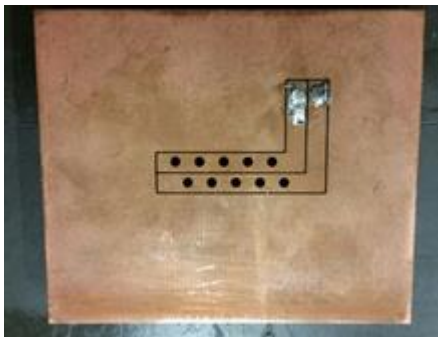

THGEM embedded in the chamber lid

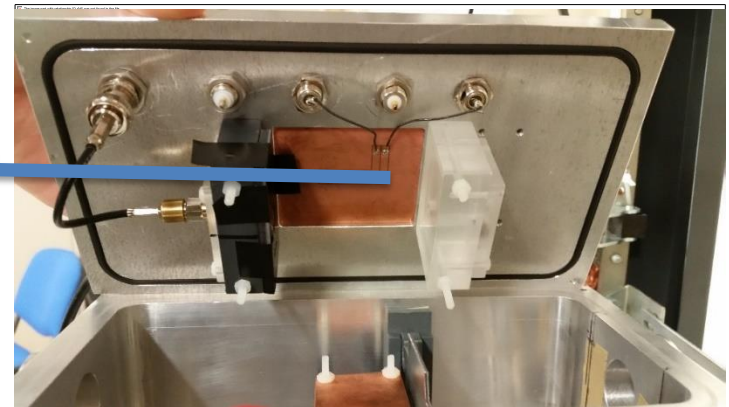


# Dark Rate: acrylic vs FR4 boards

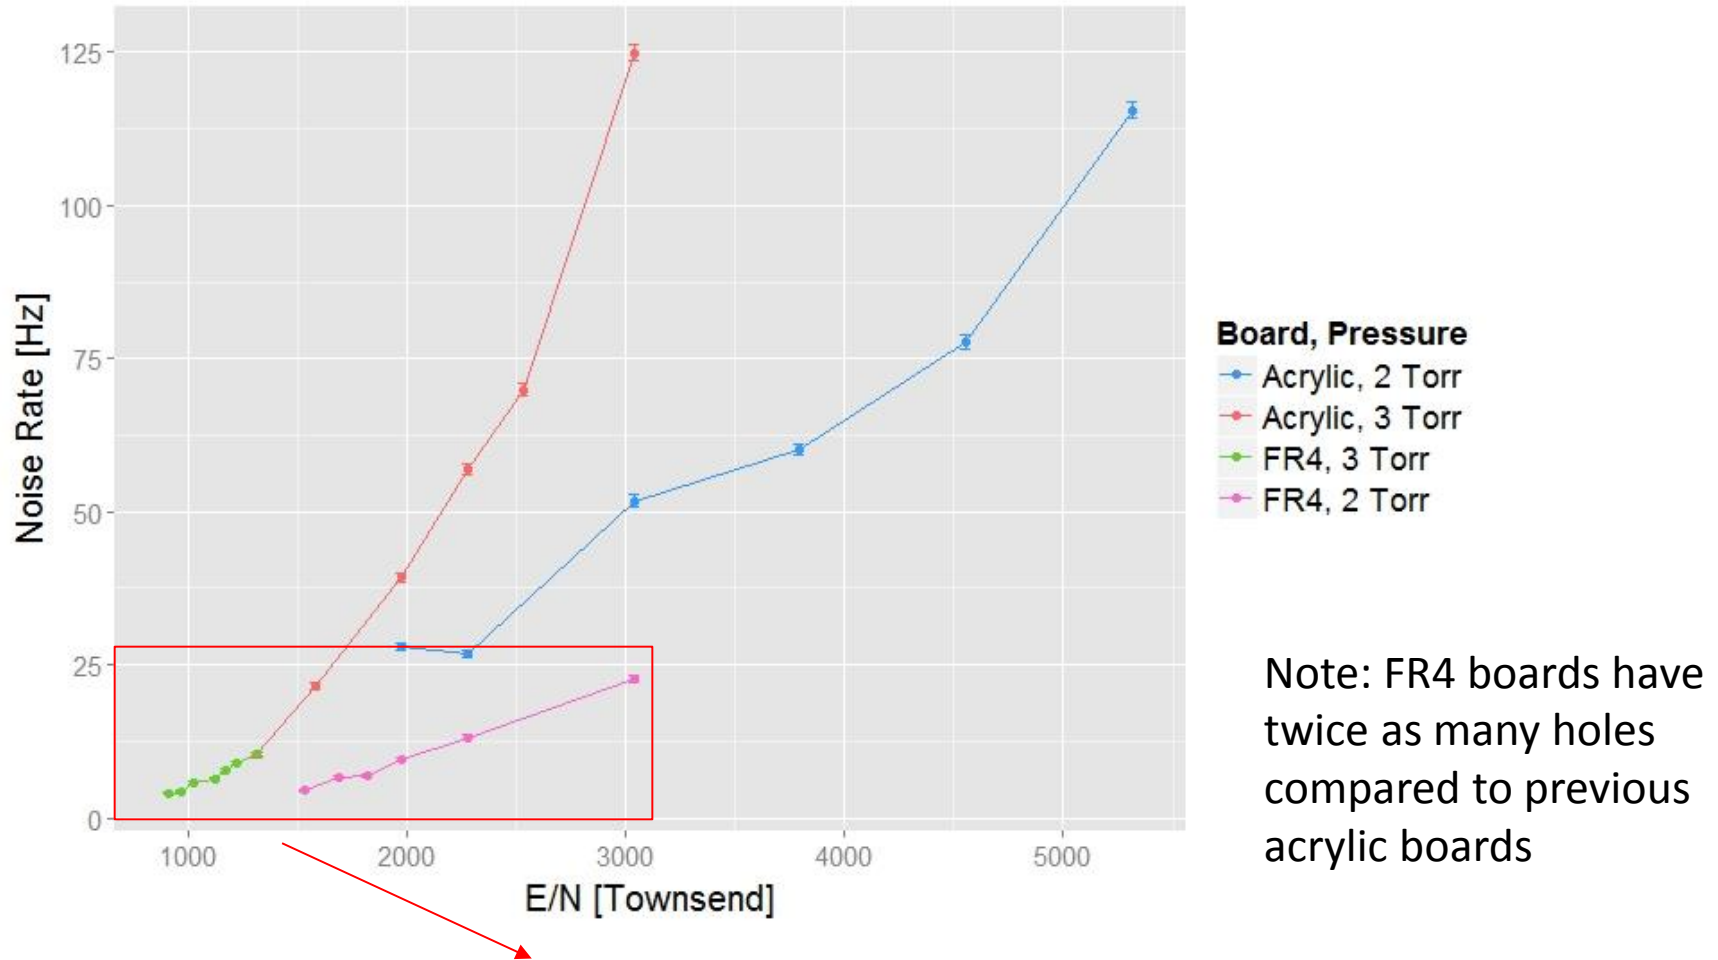

Reduction of noise with FR4 CERN boards due to better manufacturing technique and, possibly, properties of FR4 material


# Design 1 (6 mm pitch) vs Design 2 (4 mm pitch)

Mean counts/trigger: mean number of detected ions per primary particle

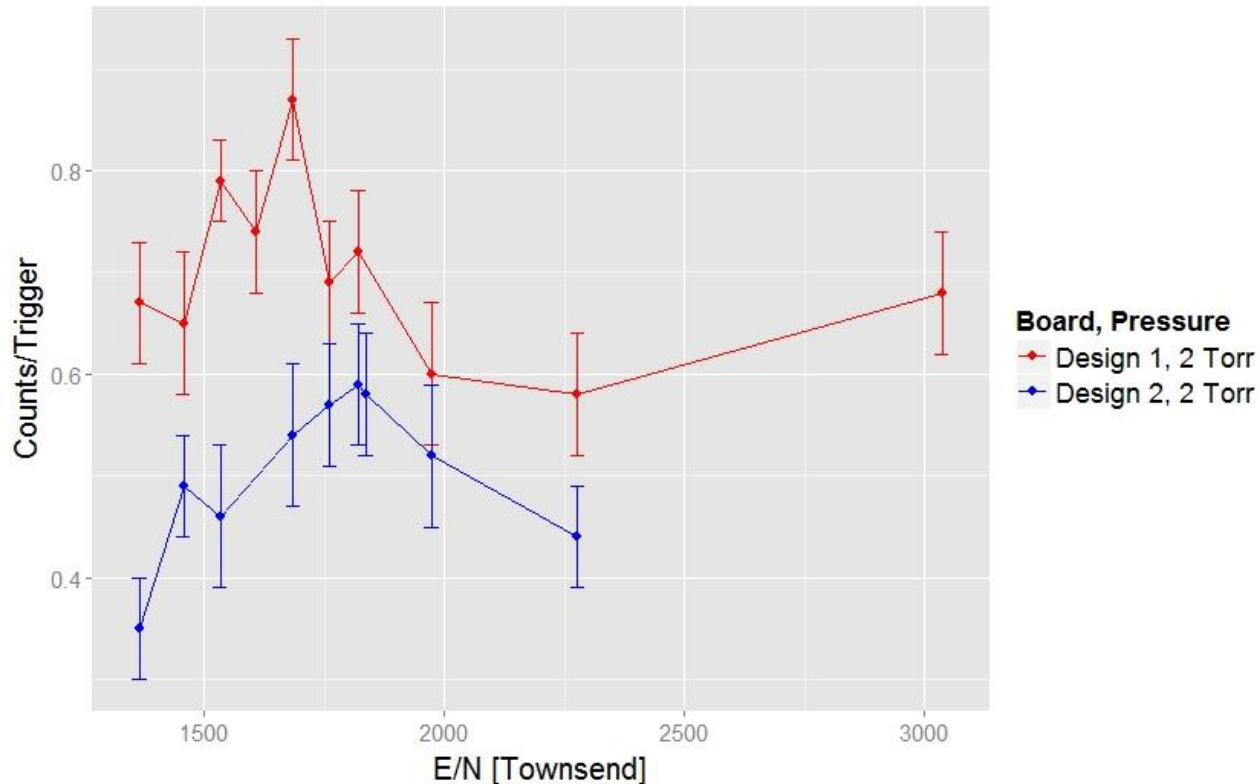

	Expected counts/trigger at 2 Torr	Expected counts/trigger at 2 Torr (with dead time)
Design 1	10	1.0
Design 2	16	1.5

# Measurements at the PTB microbeam

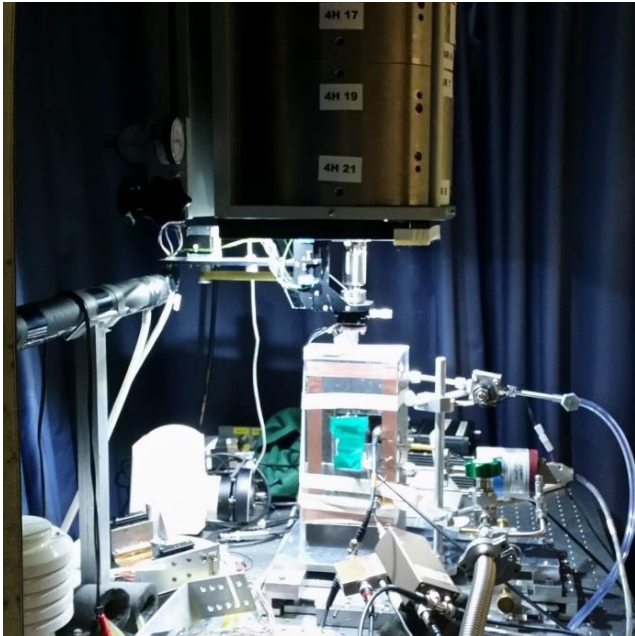

## Primaries:

- Protons: 10 MeV
- Alphas: 8 MeV, 20 MeV
- Beam size:  $\sim 5$   $\mu\text{m}$  at the vacuum window
- Primary rate: 6Hz


## Detector:

- Design 1 board and Schott glass


	Measured c/t	Expected c/t	Expected c/t with dead time	Ion detection efficiency
Alpha 10 MeV	$0.7 \pm 0.1$	5.3	0.7	13%
Alpha 20 MeV	$0.3 \pm 0.1$	1.1	0.2	27%
Proton 10 MeV	$0.06 \pm 0.1$	0.13	0.02	46%

# Scan of The Sensitive Area


20 MeV alphas

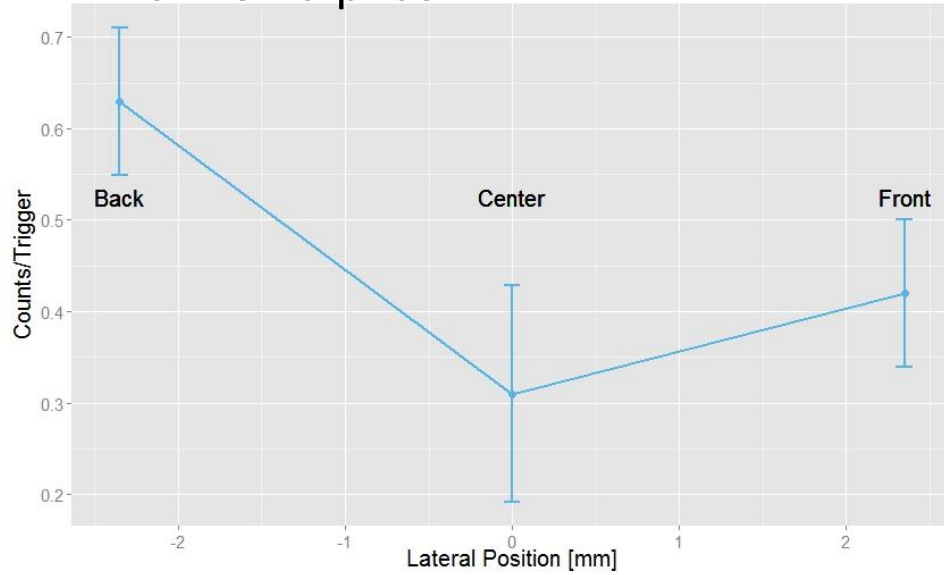

Electric field lines and electric potential

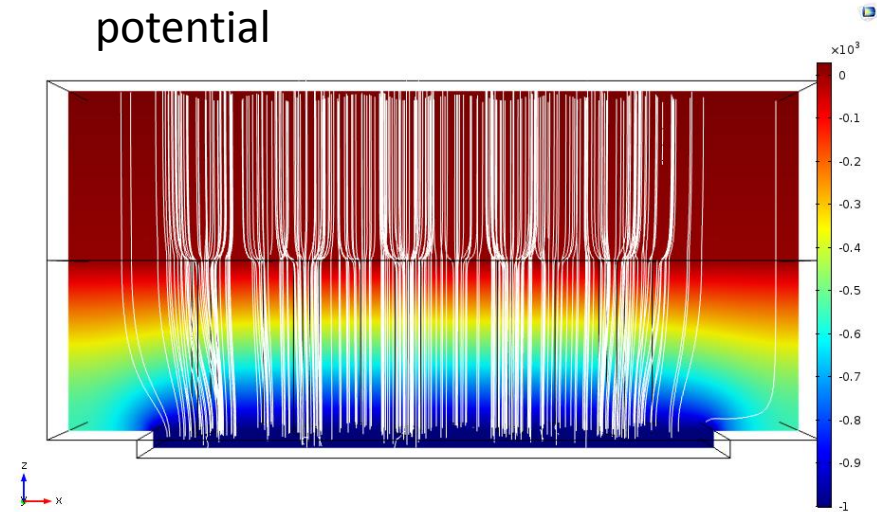


Beam: 2 mm FWHM at center of SV

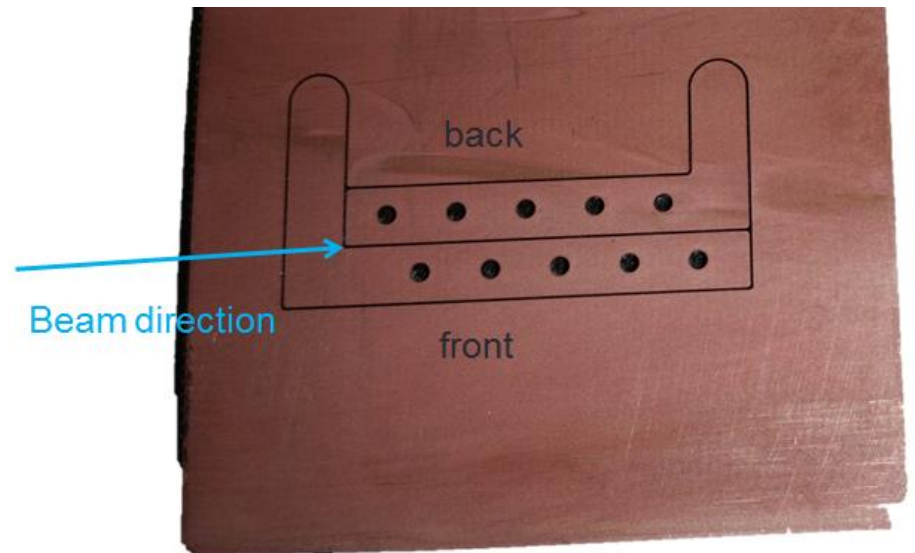




# Efficiency vs Primary Rate

20 MeV alphas

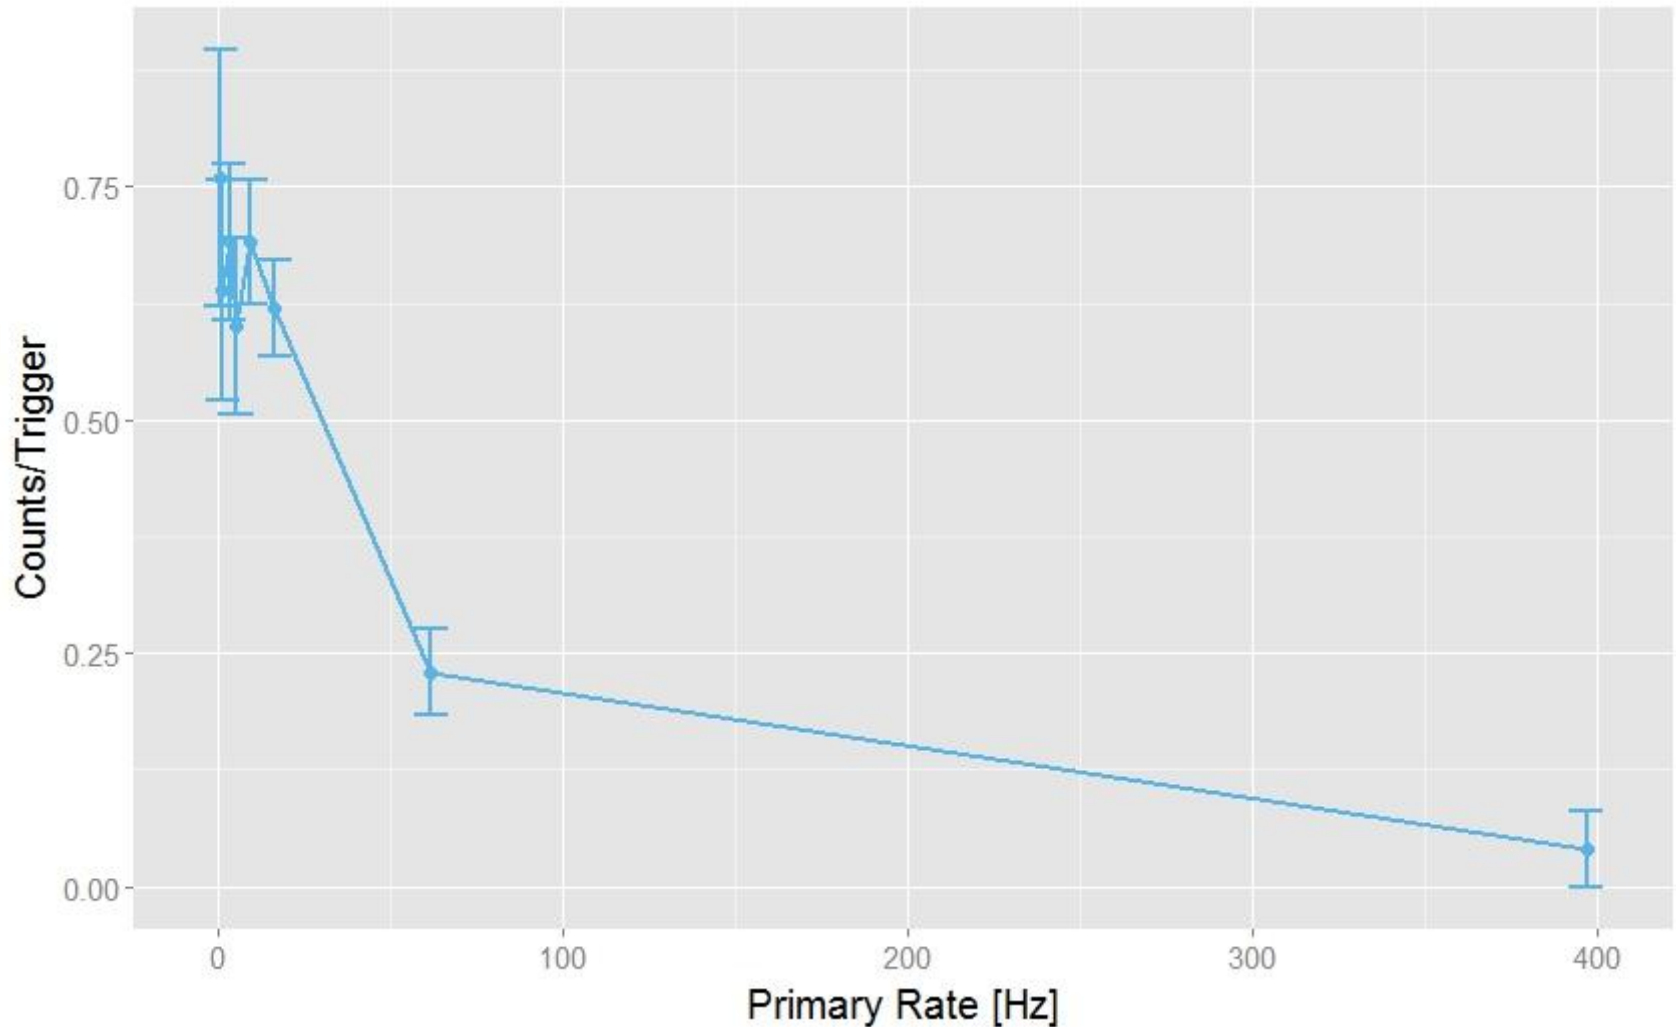

# Efficiency vs Cathode Resistivity

pitch 4 mm

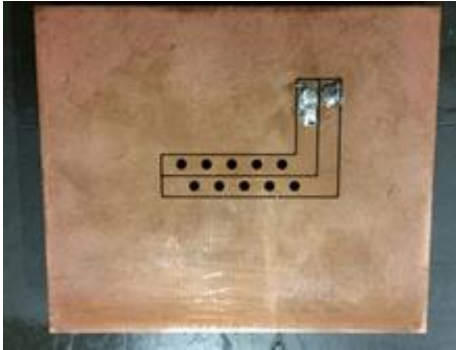

Glass type	Float	Schott	Chinese
Resistivity	$10^{12} \Omega\text{cm}$	$10^{11} \Omega\text{cm}$	$10^{10} \Omega\text{cm}$
Thickness	2 mm	3 mm	1 mm
Efficiency	7%	42%	65%
mean C/T	0.08	0.69	1.03

# Further Increase With Larger Pitch

Glass type	Float	Schott	Chinese Pitch: 4 mm	Chinese Pitch: 6 mm
Resistivity	$10^{12} \Omega\text{cm}$	$10^{11} \Omega\text{cm}$	$10^{10} \Omega\text{cm}$	$10^{10} \Omega\text{cm}$
Thickness	2 mm	3 mm	1 mm	1 mm
Efficiency	7%	42%	65%	89%
Max C/T	0.08	0.69	1.03	2.2

# Summary & Outlook

- Ionization events produced in low pressure gas can be detected with single-ion resolution
- The ion detection efficiency can be enhanced and dead time reduced by using thick GEMs (1cm) and by lowering cathode resistivity
- Efficiency needs to be further optimized to reconstruct the 3D spatial distribution of ionization tracks

Main open issues – next steps:

- Optimization of cathode resistivity and design
- Charge-up of dielectric material

# Acknowledgements


- Ulrich Giesen for support of microbeam measurements at PTB
- Gas Detector Development Group at CERN for technical support and advice

THANK YOU




Back up slides

# PREVIOUS MEASUREMENTS WITH DIFFERENT CATHODES

1 hole 1 mm diameter  
Board 6.5 mm thickness pitch 1 cm




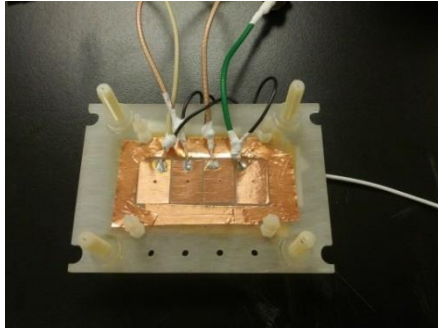


24x24 holes .8 mm diameter  
Board 3.3 mm thickness pitch 0.8 mm

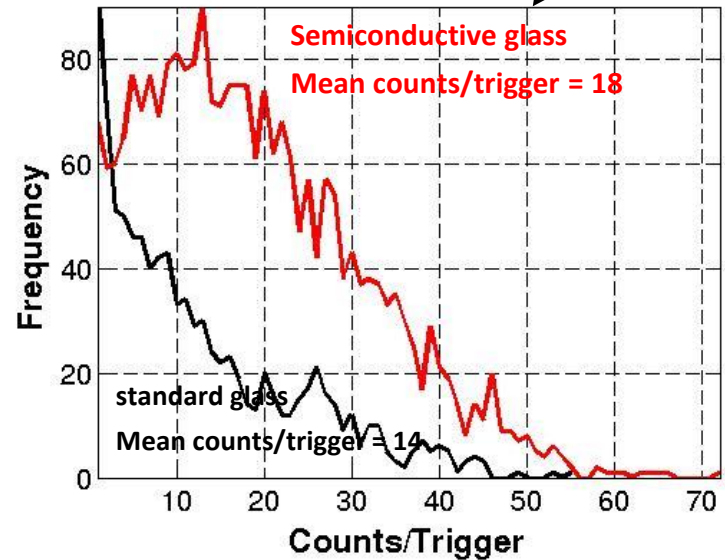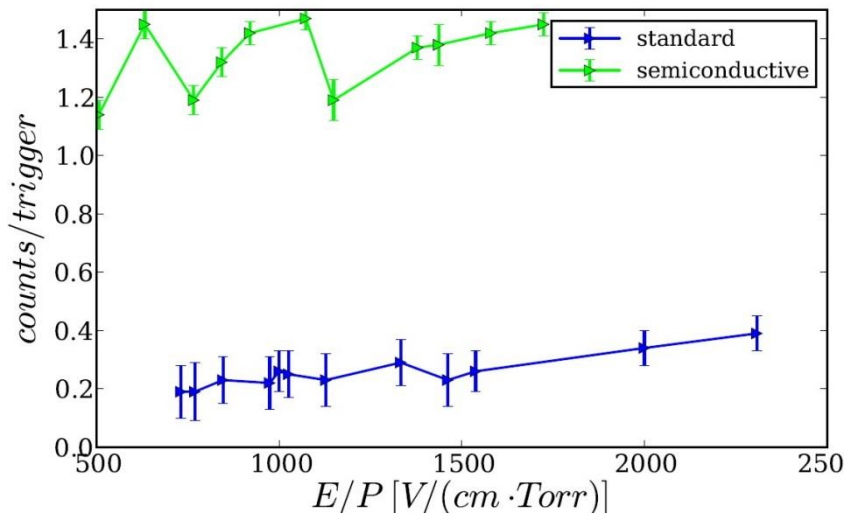



# CATHODE RESISTIVITY MEASUREMENTS

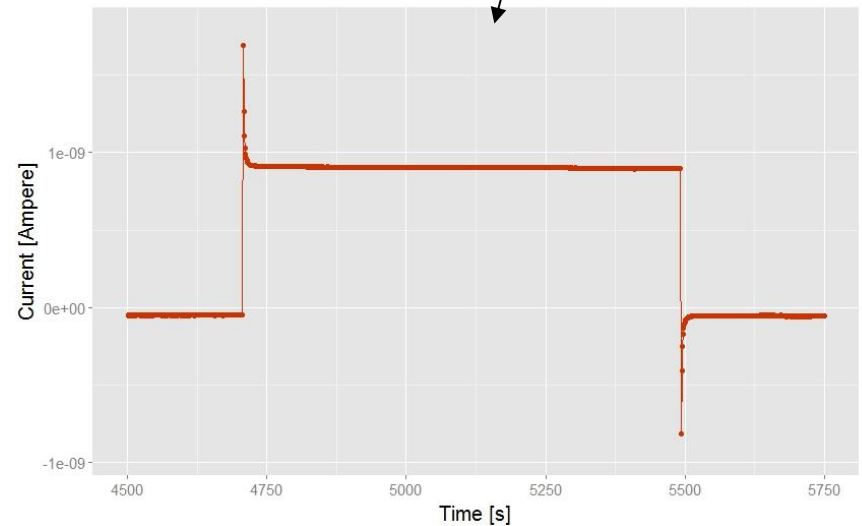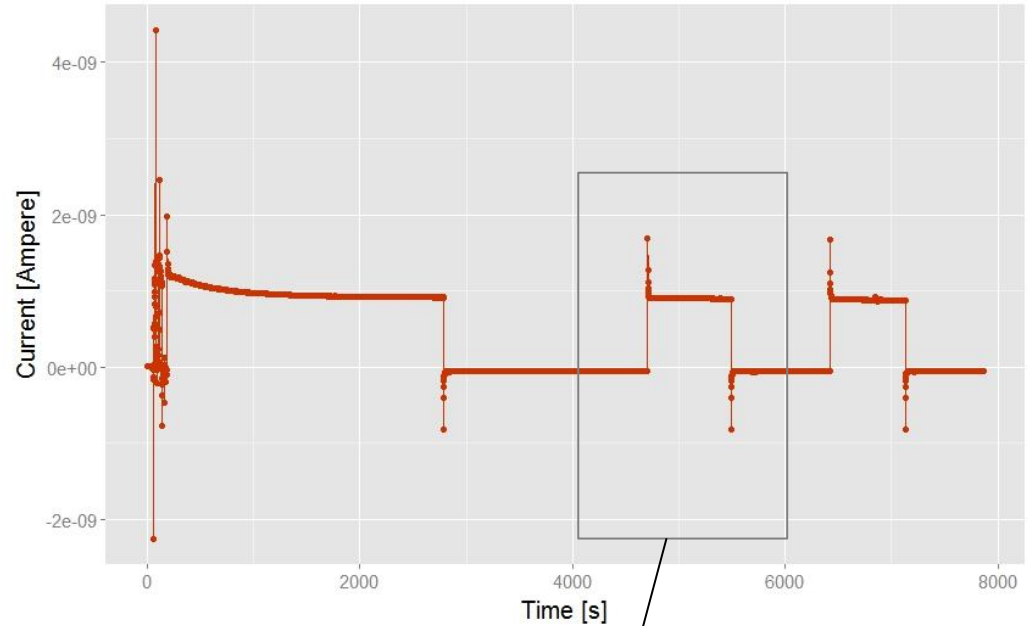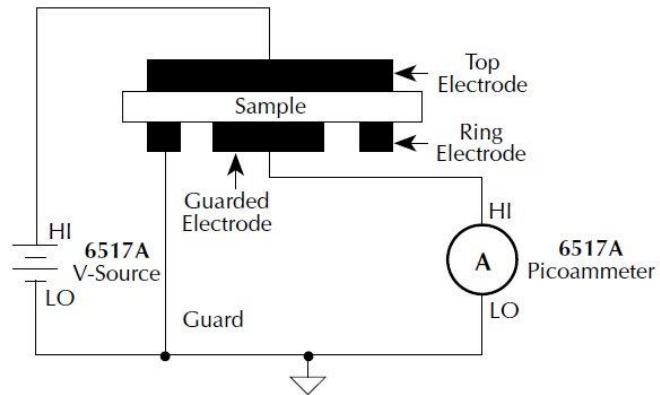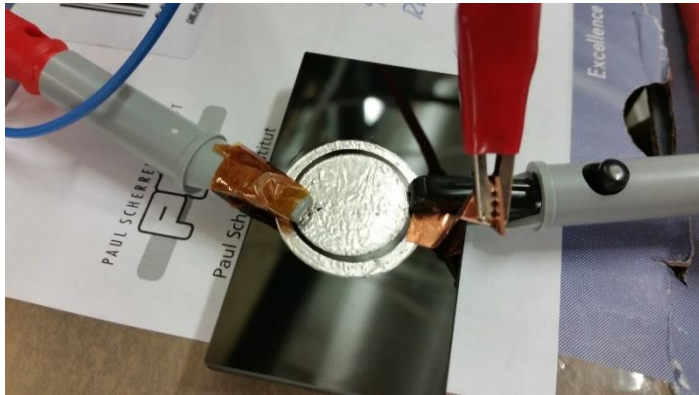


(at 50 Volts)

$A = 279.7 \text{ mm}^2$


$\rho (10^{12}) [\Omega\text{cm}]$

$0.53 \pm 0.2$

# Chinese Glass

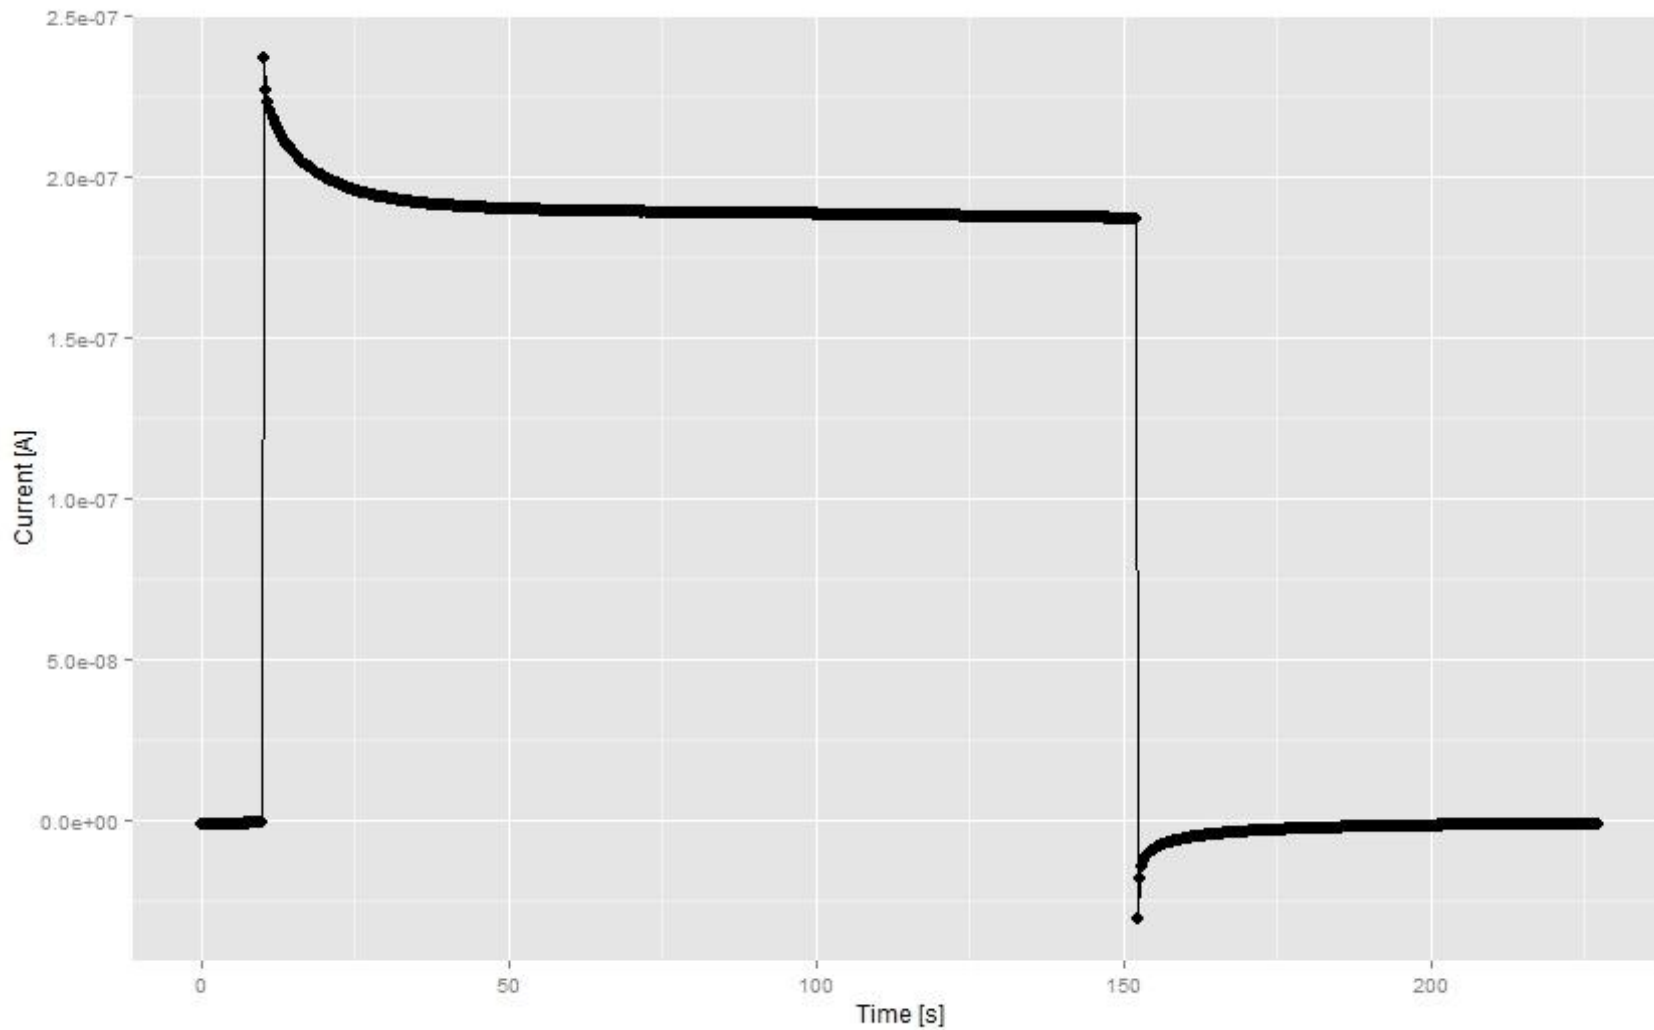

# Dark Rate

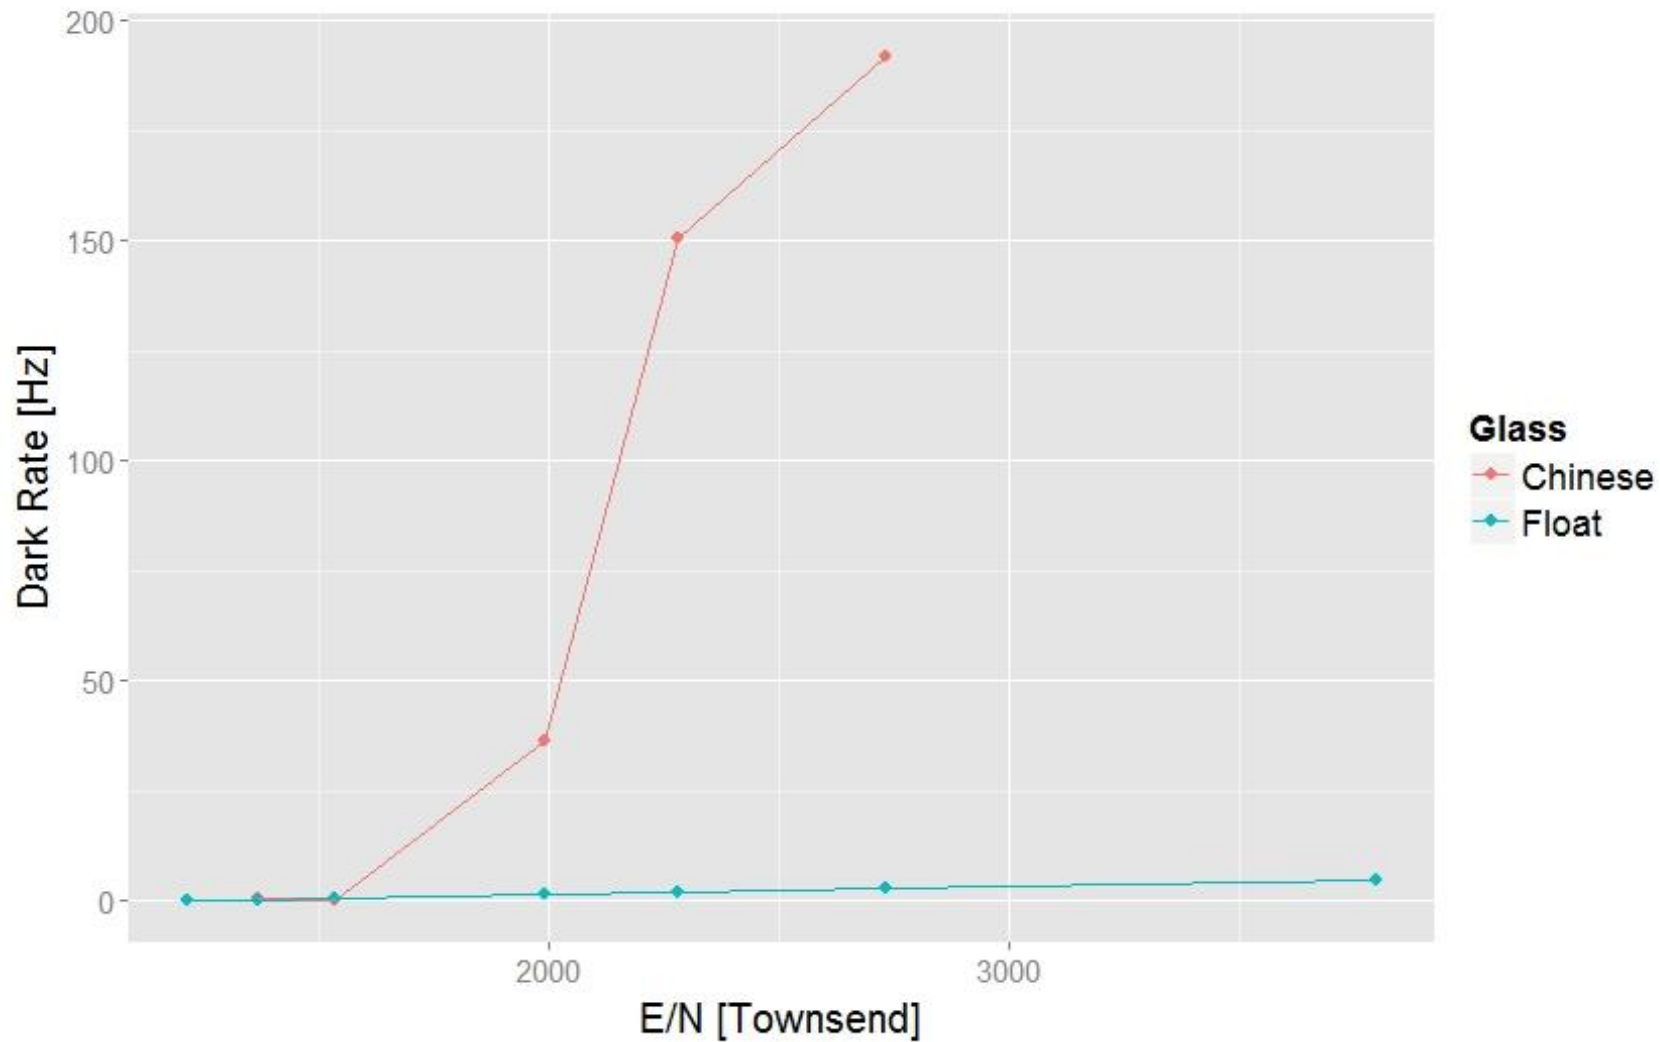

# Dark Rate

